

Van Gogh Wood



The iconic Van Gogh range showcases enduring American style and performance while capturing nature in its rawest form. These stunning looks are highlighted by a variety of effects, including distressed, limed and reclaimed processes in a hardwearing 48" x 7" plank.

A selection of these gluedown visuals are available in an additional rigid core construction, giving you the visuals you want in the construction you need.







Hygienic



Durable



maintenance

Van Gogh Gluedown requires familiar gluedown application methods for a secure fit. Choose our gluedown planks if you prefer to personalize your space with design strips or wish to have additional layout flexibility, in applications where sound transmission isn't a concern, or when you prefer the planks be permanently adhered to the subfloor.

Van Gogh Rigid Core can be installed over most existing imperfect subfloors with minimal preparation and no need for adhesive. Select rigid core in upper levels to reduce sound transfer by 22dB, over subfloors prone to moisture (up to 95% RH), and over uneven subfloors.


Gluedown		Rigid Core	
48" x 7"	Plank Size	48" x 7"	
20mil	Wear Layer	20mil	
3mm	Thickness	4.5mm	
Lifetime	Residential Warranty	Lifetime	
15 years	Commercial Warranty 15 years		
Begins with VGW	Product Code	roduct Code Begins with SCB	





Colors Available in Gluedown and Rigid Core



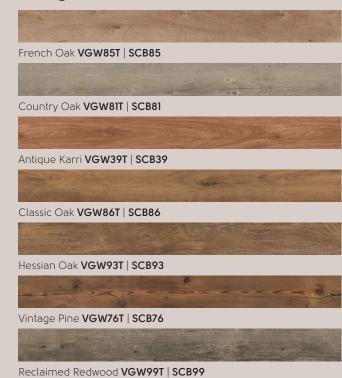

Colors Available in Gluedown Only





French Oak

VGW91T | VGW92T | VGW93T | VGW94T

Highlighted by rich, distinctive grains and vibrant colors, our French oaks add beautiful character with a touch of sophistication to your space.



American Redwood

VGW99T | VGW100T | VGW101T


Redwoods are among the tallest and oldest trees in the world and grow along the forests on the Pacific coast, where they are exposed to saltwater air. Our design was developed from a reclaimed railroad tie made of American redwood and captures the aged beauty of the original plank.



Mexican Cypress

VGW95T | VGW96T

Featuring some of the most detailed and unique designs in our Van Gogh range, our Mexican Cypress planks replicate burnt and limed finishes for a refined, sophisticated aesthetic.



Scottish Beech

VGW97T | VGW98T | VGW102T


Our Scottish Beech planks showcase the rich, charred tones found in smoked wood flooring. The subtle, well-balanced color variations provide a warming foundation for any décor.



Classic

VG1-7 - VGW89T

Part of our original Van Gogh range, these planks include a variety of timeless designs, from traditional to rustic. They offer all the beauty and none of the maintenance hassles of real hardwood floors. It's not just the floor you lay, but how you lay it that makes a lasting impression. We offer numerous pattern possibilities to make the most of your space. Add design strips and borders for a truly unique look.

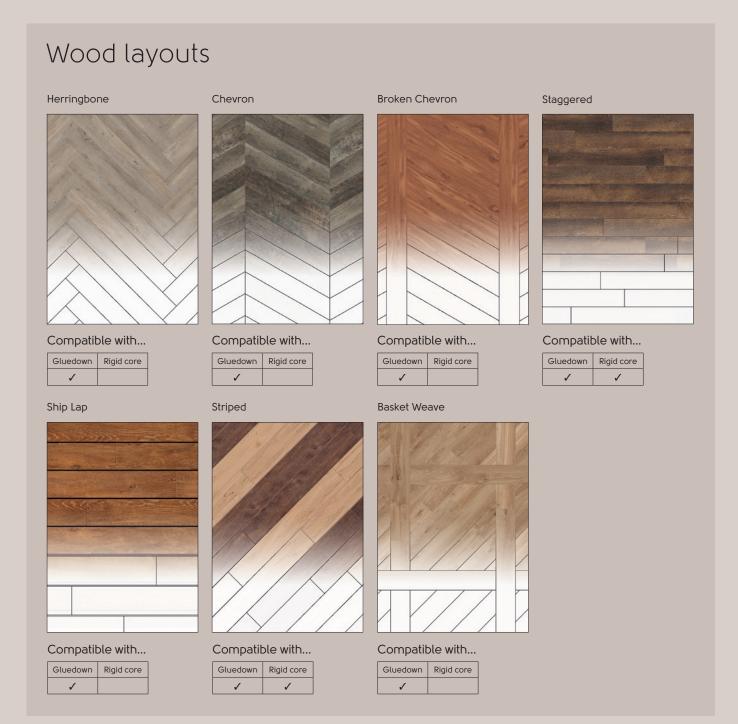





Salvaged Redwood **VGW101T**

Lancewood SCB44

Van Gogh Wood



48" x 7" (1219mm x 178mm)



Country Oak VGW81T | SCB81



Aged Redwood VGW100T* | SCB100*



Reclaimed Redwood **VGW99T* | SCB99***



Tawny Oak **VGW91T*** | **SCB91***



Ebony **VGW89T**

^{*}Please note: as a feature of the design, these products incorporate high color variation between individual planks.



Macrocapra **VGW50T**



French Oak **VGW85T | SCB85**



Reclaimed Maple **VGW71T | SCB71**



Honey Oak **VGW94T***



Melbourne Larch **VGW40T**



Jatoba **VGW42T*** | **SCB42***

^{*}Please note: as a feature of the design, these products incorporate high color variation between individual planks.



Antique Karri **VGW39T | SCB39**



Rimu **VGW49T**



Classic Oak **VGW86T | SCB86**



Copper Gum **VGW33T**



Burgundy Oak **VGW92T***



Wellington Oak $VGW53T^* \mid SCB53^*$

^{*}Please note: as a feature of the design, these products incorporate high color variation between individual planks.



Lancewood VGW44T* | SCB44*



Vintage Pine **VGW76T* | SCB76***



Hessian Oak **VGW93T* | SCB93***



Burnt Ginger **VG5-7**



Smoked Oak **VGW70T | SCB70**



Merbau **VGW41T***

^{*}Please note: as a feature of the design, these products incorporate high color variation between individual planks.



Christchurch Oak **VGW54T***



Lime Washed Cypress **VGW95T***



Bracken **VG1-7**



Aged Kauri **VGW51T**



Smoked Beech VGW98T*



Charred Oak VGW102T*

^{*}Please note: as a feature of the design, these products incorporate high color variation between individual planks.



Burnished Cypress VGW96T*



Salvaged Redwood **VGW101T***



Burnished Beech VGW97T*



Try our Floorstyle Floor Designer

View a larger representation of each product in commercial spaces by using our interactive Floorstyle design tool.



www.karndean.com/commercialfloorstyle

*Please note: as a feature of the design, these products incorporate high color variation between individual planks.



Technical Specification

	Standard	Gluedown Result	Rigid Core Result
Thickness		3.0 mm	4.5 mm
Size*		48" x 7"	48" x 7"
Locking system**			Click locking
Wear layer		20 mil (0.50 mm)	20 mil (0.50 mm)
Box quantity		35 sq.ft / 15 Planks	23.64 sq.ft / 10 Planks
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Warranty***	Commercial Residential	15 years Lifetime	15 years Lifetime
Standards	ASTM F3261		Pass: Resilient flooring with Rigid Polymeric Core
Beveled edge		Micro	Micro
Classification	ASTM F1700	Class III Type B	
Reaction to fire	ASTM E648-06	Class 1	Class 1
Smoke density	ASTM E662-06	Pass (<450)	Pass (<450)
Flammability test	FF 1-70; Federal Approval ASTM D2859	Pass	Pass
Slip resistance****	ASTM D2047	Pass (Dry 0.89)	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass	Pass
Heat fastness	ASTM F1514		Pass
Light fastness	ASTM F1515	Pass $\triangle E = 3.3$	Pass
Electrostatic propensity	AATCC 134		1.1 kV
Abrasion resistance	ASTM D3884 ASTM D4060	115000 cycles	Pass 20000 cycles
Dimensional stability	ASTM F2199 ISO 23999	Pass -0.002"/lin.ft	Pass -0.002″/lin.ft Pass
Acoustic impact noise reduction	ASTM E2179-09	\triangle IIC = 6 dB	∆IIC = 22 dB
	ASTM E492-09	IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	IIC = 69 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
		For settings that require additional noise Business Manager for our portfolio of ac	reduction, contact your Commercial
Indentation-residual	ASTM F 1914		Pass
Static load	ASTM F970	1000 psi	Pass 600 psi at 0.005"
Flexibility	ASTM F137	Pass	
Adhesive	Please refer to our installation instructions.		
Recycling		Suitable	Suitable
Phthalate free		Yes	Yes











- Exact size 48.03" x 7.09".
- ** Produced under Licence from Flooring Industries.
- *** Subject to terms, please see our website. Full technical data is available on our
- **** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Color and Pattern Reproduction

We are careful to make sure our brochures are accurate and printed to very high standards, but photography and printing cannot always create a perfect representation of our products. For this reason we strongly recommend that you look at a sample of any product you are considering before placing your order.

All of our products are inspired by things we have seen in the natural world. Just as variation in color and detail is part of the unique beauty of natural materials, it is also a feature of many of our designs. This means that with some of our products you will see natural variation when your floor is laid. If in doubt, ask to see a larger sample of the product.



www.karndean.com KD5165USA |

Cover image: Lancewood **VGW44T** with DS07 10mm design strip

Karndean Designflooring 1100 Pontiac Court

Export, PA 15632

Phone: 888-266-4343

Email: info@karndean.com

Karndean Designflooring Canada

#3-3250 Harvester Road Burlington, Ontario

Phone: 866-819-6825